



- DECIDE WHETHER THE FIREPLACE ENCLOSURE WILL NEED TO BE OVERLAP MOUNT OR INSIDE FIT.
 - Overlap Mount:** Most brick, marble, granite, tile or any other smooth surface fireplace will allow for a standard Overlap Mount. If an overlap mount is used on an uneven surface, two steps are needed to insure a good fit.
 - Ask for Maximum Overlap. This will help cover any gaps caused by irregular Stone.
 - Ask for Flanges. These will go inside the opening and will help to seal gaps. These Flanges will also give the installer something to pack mortar or insulation against.
 - Inside Fit:** Fireplaces that have irregular facing; like field stone, river rock, or any other uneven surface, may require an inside fit, in which the fireplace enclosure will be mounted inside the opening.
- MEASURE THE FIREPLACE OPENING AND FILL IN THE CORRECT BOXES BELOW. **IMPORTANT:** WHEN MEASURING, ALWAYS MAKE NOTE OF THE LOWEST AND HIGHEST POINTS.


RECTANGLE:

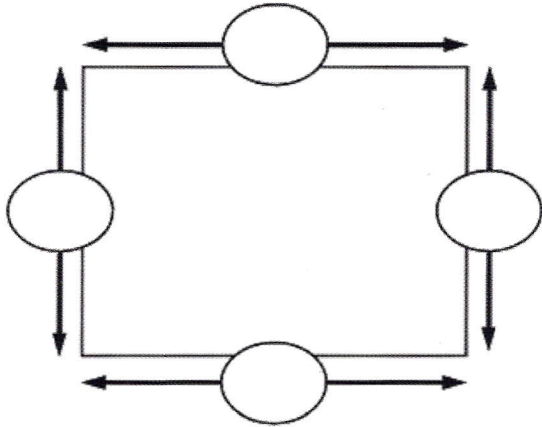


ARCH:

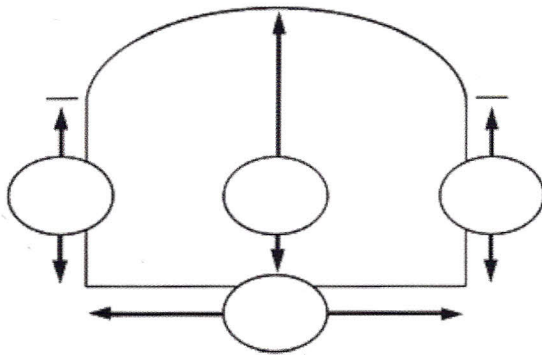

CORNER OR PENINSULA:

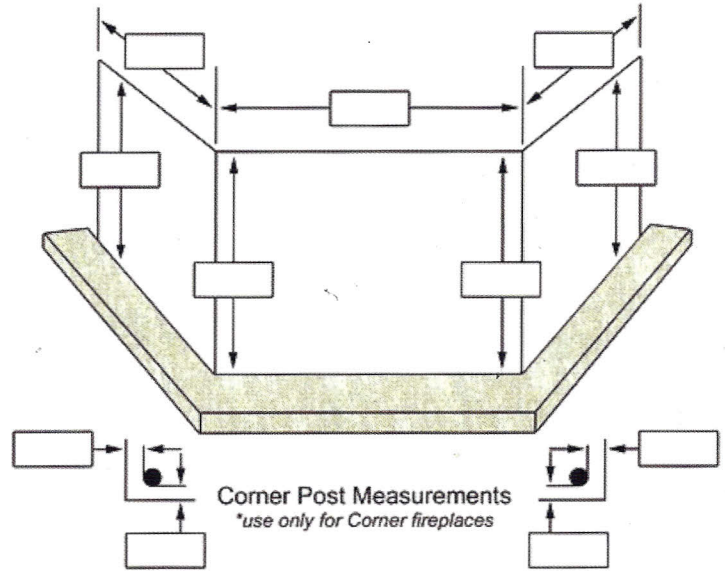

SIDE VIEW

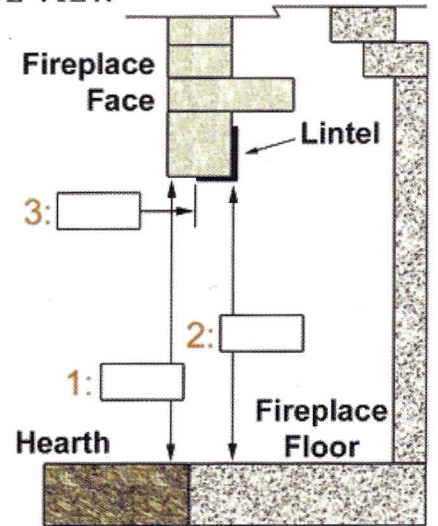

- IS THE LINTEL LOWER THAN THE FIREPLACE FACE?

No Yes - Please specify Face to Lintel (Box 3): _____
- IS THE HEARTH HIGHER OR LOWER THAN THE FIREPLACE FLOOR?

Same No Hearth

Higher - Please specify difference: _____

Lower - Please specify difference: _____

Customer Info

PO #: _____

Name: _____

Phone: _____

Dealer Info

CHURCHILL'S

3300 BEE CAVES RD. #375

(512) 328-9356